


**All Stainless
SUS-304**

Stainless outer Frame/ Stainless Inner lid



Waterproof/ Deodorant type



For mortar

26mm

Filling depth



Certified product for public building.



Simple Lock



Screw handle For pedestrian

5kN/m²



Customize Custom dimension (The outer frame size) Minimum 300×300~900×900mm or 600×1179mm

Waterproof / Deodorant type, All stainless steel top part water stop type

Water proof / Deodorant type

Enhanced with waterproof and deodorant effect by using 4 bolts and rubber packing.

All Stainless made


Main body in made of Stainless. Superior in the Corrosion resistance. (But except anchor)

Filling depth 26mm

Dedicated type for mortar filling.

Top part water stop type

By rubber packing, the structure provides that water is not easily to be entered into the inner.

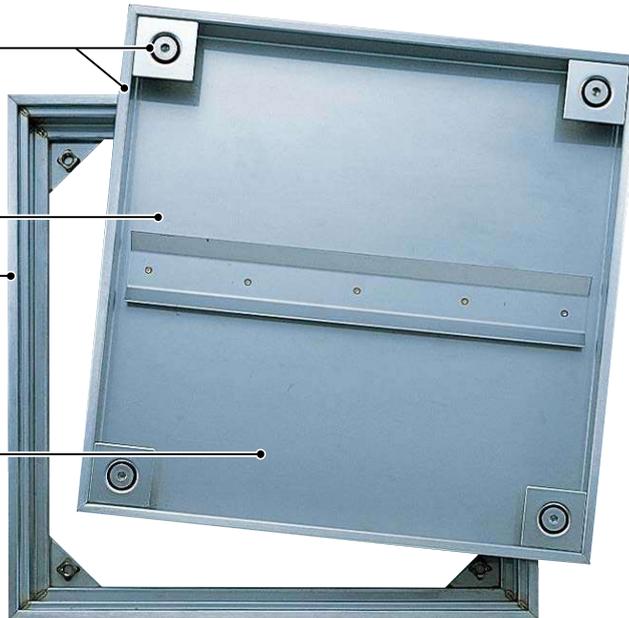


Big Size

Corresponds to the size up to 600×1179



Pull-Up Handle

The handle to hook screw head.

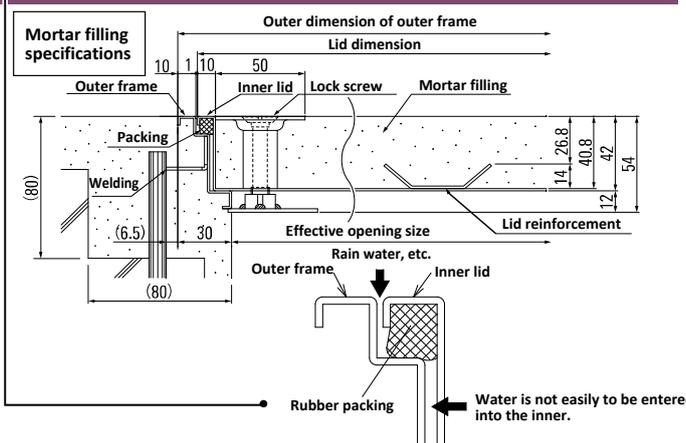

Option Pull-Up Handle

Name	Unit	QTY/CTN
FWMPDHD	1 set (2 pcs)	1

Parts	Materials	Finish	Note
Inner lid	SUS304	Hairline frame	
Outer frame	SUS304	Hairline frame	
Lid reinforcement	SUS304	-	
Packing	Chloroprene rubber	-	
Lock screw	Stainless	-	M10
Anchor	SGHC-Z27	-	

Size	Effective opening size (mm)	Outer dimension of outer frame (mm)	Lid dimension (mm)	Lid reinforcement material	Quantity of lid	Name	Packaged Qty/ Per carton	Accessories		Lid weight
								Spacer for frame	Pull-up handle	
45	390	450	428	1	1	FWP245	2	8	2	18.2
60	540	600	578	2	1	FWP260	1	12	2	33.2
75	690	750	363.5×728	1	2	FWP275	1	14	2	26.0
90	840	900	438.5×878	2	2	FWP290	1	14	2	37.8
6012	540×1119	600×1179	578	2	2	FWP26012	1	14	2	33.2

● The type for mortar filling

Note

- To keep the effect of Waterproof and deodorant, filling work by mortar for lid and surroundings to be perfectly done.
- During installation work and when lid is opened/closed, cleaning job is required for packing surface and adhesion surface of frame.
- Don't apply to the place where always submerged in water or snow fall.