
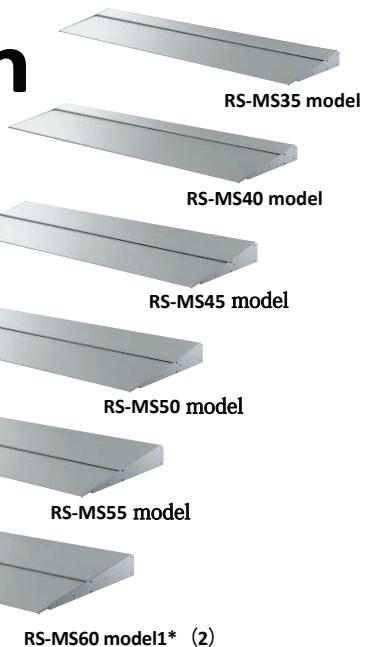


# RS-MS [RS-MS (60/55/50/45/40/35)<sub>model</sub>]

Slope	Front	Back	Free	Type	Material	Depth
				UV	Aluminum	350・400・450・500・550・600mm

**Simple and sharp design**  
**Easy installation**  
**with bracket system !**

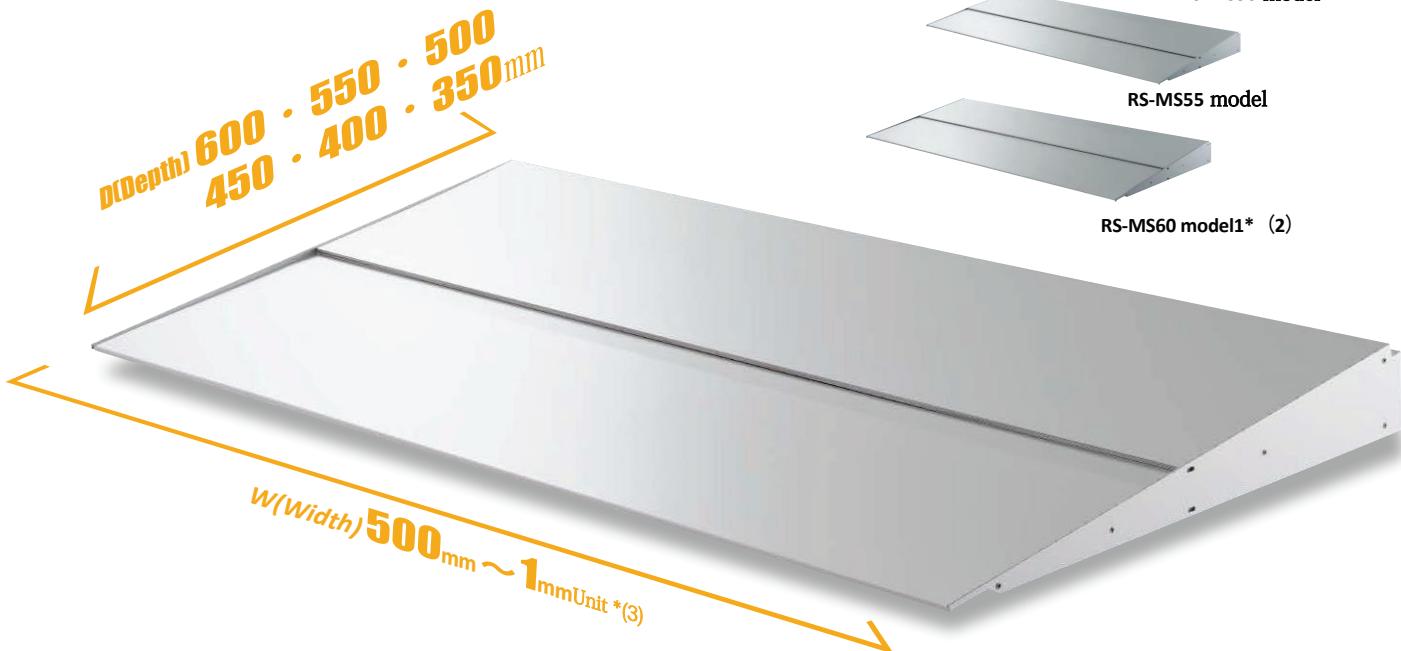

■ Standard colors (composite coating)

Silver (matt finish)



Stainless color (matt finish)




■ Option




LED lighting, spot type  
RSOLED (N/L) 2

N: Neutral white / L: Warm white

φ49×11.5



External corner



Internal corner



\*1 Brackets are available in a continuous type (single piece with a length of canopy width W - 10 mm) and a piece type (multiple pieces of 100 mm).

\*2 The piece-type bracket for model RS-MS60 is intended for low-rise buildings.

\*3 The maximum W dimension for the single-piece (continuous) type is 3200 mm.

