

CXBA [CXBA Silver]

Frame Type	Airtight	Steel Framing	Wood Framing	Hanger Bracket	Support Bracket	Wood Screw Fixing	Key
Custom Custom Dimension 303x303 ~ 1003 x 1503mm	Custom Custom Finish	Inner Frame Wire	Wood Mounting Bracket	Screws for stud framing	Certified for public building	Recommended for seismic ceilings	

Large airtight model for high-airtight homes

Hanger (Bracket)
Flexible installation position with a free hanger system.



Double Hinge Structure
A large opening area and wide opening angle.

Airtight Type
Airtight material improves HVAC efficiency and sound insulation.
Equivalent to JIS A 4706 A-4 airtightness grade.

1 lid (standard)
2 lids (non-standard)

Drawing

Drawing (Wood Framing)

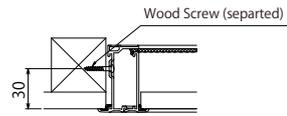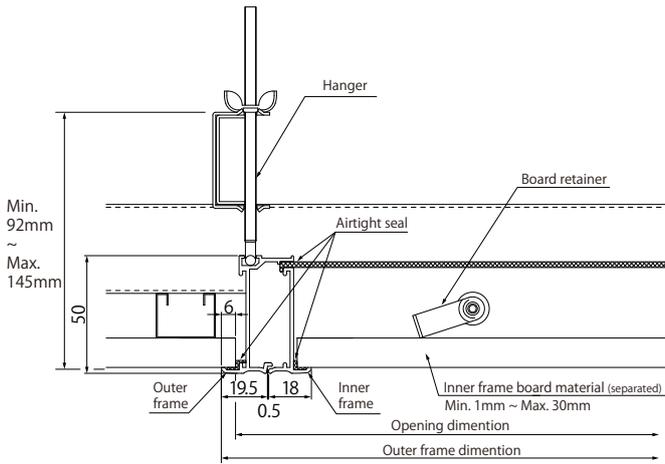

Comopnent	Material	Finish
Inner frame / Outer frame	A6063S-T5	Anodized coating
Hinge material	A6063S-T5	Anodized coating
Coin Lock	Zinc alloy die casting	Electroplated zinc
Support bracket	SPCC	Electroplated zinc
Board holder	SPCC	Electroplated zinc
Board support angle	A6063S-T5	Anodized coating
Airtight seal	EPDM foam	-
Hanger	SPCC	Electroplated zinc

Model	Size	Lid Qty	Outer frame dim. (mm)	Opening dim. (mm)	Cutting dim. for inner frame board (mm)	Name	Unit	Qty/Ctn.	Included Accessories (pc)		
									Board retainer	Board support angle	Hanger
CXBA	609	1	618 x 915	606 x 903	554 x 851	CXB609A	1unit	1	7	2	8
	909	1	915	903	851	CXB909A			9	2	8
	612	1	618 x 1215	606 x 1203	554 x 1151	CXB612A			7	3	8

- Installation on a wood substrate is also possible. (Mounting screws are not included.)
- For the unequal-sided type, the inner frame hinge is on the longer side.
- White color is also available. (made to order)

= Made to order